

Tri-axial IEPE accelerometer

Description

Model 533AM1 is an IEPE triaxial accelerometer designed for testing applications. The accelerometer uses shear piezo electronical element which provides a wide operating frequency range. The IEPE sensor combines outstanding crystals and low noise integral microelectronics to achieve very low sensitivity variation over the operating temperature range, compared to other sensing element designs. The shear element technology also ensures high immunity to base strain errors. The accelerometer uses a welded titanium construction and a light weight connector for lower mass and wider frequency operation. Model 533AM1 can be mounted by screw through the center hole benefit of flexible cable exit. Excellent frequency response, both amplitude and phase, provide the user with a triaxial accelerometer ideally suited for structural and component testing, drop tests and general laboratory vibration work. The miniature size of this accelerometer enables the test engineer or technician to measure the accelerations of three orthogonal axes of vibration simultaneously on lightweight structures. All variations provide reliable measurements and long-term stability.







Features

- Tri-axial measurement
- Case Isolated
- Connector output
- Through hole mounting
- Hermetic seal
- Annular shear mode
- Wide temperature range
- Wide frequency response

Application

- Vibration monitoring
- Shock testing
- Road testing
- Modal analysis
- Aircraft testing

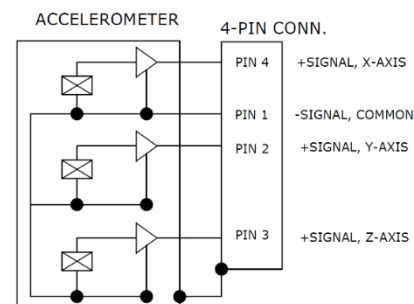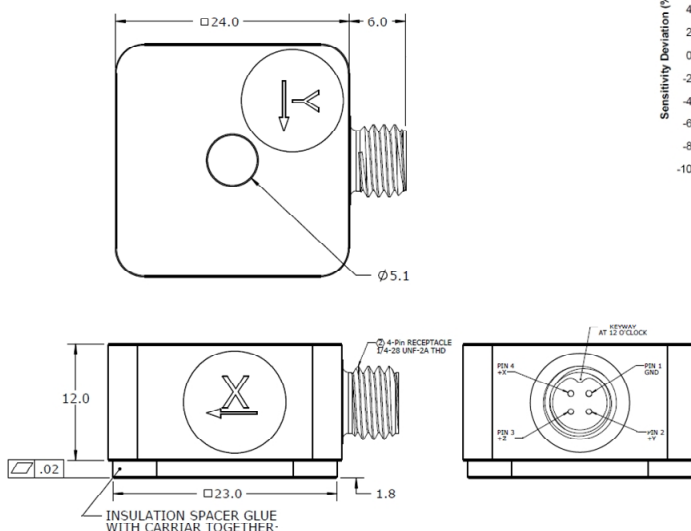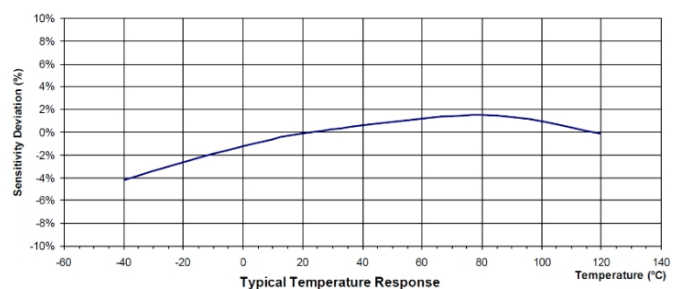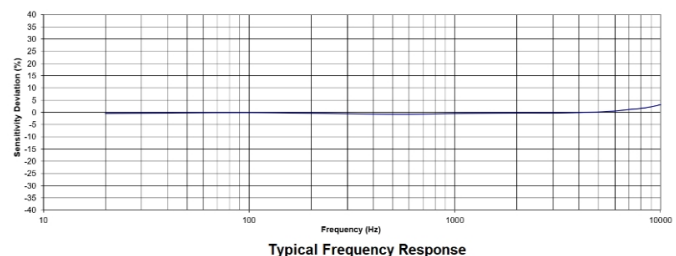

Specification

Typical at +24°C (+75°F), 24Vdc, 4 mA and 100Hz, unless otherwise stated.

Part Number	533AM1-10	533AM1-20	533AM1-50	533AM1-100	533AM1-200	533AM1-250	533AM1-500	
Measurement Range	10	20	50	100	200	250	500	g
Sensitivity, $\pm 10\%$	500	250	100	50	25	20	10	mV/g
Frequency Response, $\pm 10\%$	5-5000	2-6000	0.5-10000	0.5-10000	0.5-10000	0.5-10000	0.5-10000	Hz
Frequency Response, $\pm 3\text{dB}$	3-7000	1-8000	0.4-15000	0.4-15000	0.4-15000	0.4-15000	0.4-15000	Hz
Resonant Frequency	38	38	38	38	38	38	38	kHz
Transverse Sensitivity	<5	<5	<5	<5	<5	<5	<5	%
Temperature Response, -55 to +125°C	± 10	± 10	± 10	± 10	± 10	± 10	± 10	%
Non-Linearity	± 1	± 1	± 1	± 1	± 1	± 1	± 1	%FSO
Residual Noise (2 Hz to 30 KHz)	0.0002	0.0003	0.0004	0.0005	0.0005	0.0005	0.0012	Equiv. g RMS
Shock Limit	5000	5000	5000	5000	5000	5000	5000	g







Parameters	Value	Units
Bias Voltage (Room Temperature)	8 to 12	Vdc
Bias Voltage (-55°C To 125°C)	6 to 13	Vdc
Output Impedance	<100	Ω
Full Scale Output Voltage	± 5	V
Insulation Resistance (@100Vdc)	>100	M Ω
Supply (Compliance) Voltage	18 to 30	Vdc
Supply Current	2 to 10	mA
Operating & Storage Temperature	-55 to +125°C	°C
Humidity	Hermetically Sealed	
Case Material	Titanium Alloy	
Sensing Element	Piezo Ceramic	
Weight	25	Grams
Mounting Torque	18 (2)	lb-in (N-m)

Accessories

Calibration certificate included.

Part Number	Description	Availability
PM0111	M5x25 socket cup head screw with insulation tube	Included
PM0242	M5 insulation flat washer	Included
13-3	3 meter mating cable with 4 pins mating connector to 3X BNC(male) connector	Optional
IN-03	3 channels IEPE signal conditioner	Optional
IN-91	Portable vibration analyzer	Optional
IN-3062	8 channels data acquisition system	Optional

Measurement configuration

Sensor	Mating cable	Signal conditioner	BNC cable	Data acquisition	Computer
					

Ordering information

533	AM1	-	50
Model	Output signal	-	Range
533	A=IEPE output M1=Connector version	-	10=10g 20=20g 50=50g 100=100g 200=200g 250=250g 500=500g



Senther reserves the right to make changes to any products or technology herein to improve reliability, function or design. Senther does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.