



## Lightning protection low frequency vibration sensor



(Patent code: ZL2014205932243)


Unauthorized copy is not permitted

### Features

- Super low frequency response
- Corrosion resistant
- Hermetic seal
- Case isolated
- Lightning protection
- Reverse wiring protection



### Application

- Windmill machine
- High structure monitoring
- High voltage switch
- Industrial machine monitoring

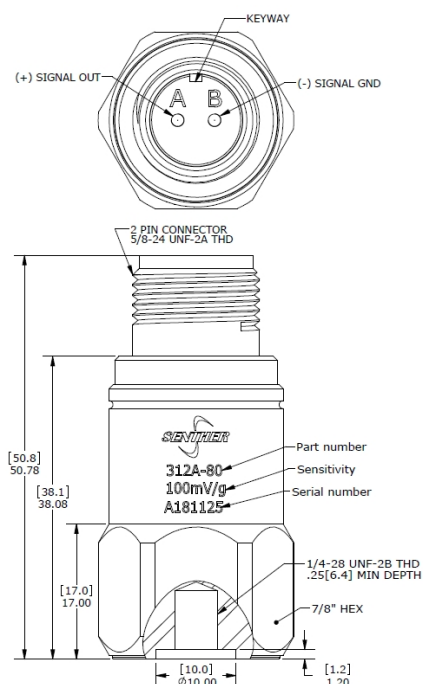


### Description

Model 312A-SLF is a lightning protection IEPE accelerometer permitting extra low frequency vibration measurements. 312A features an annular shear ceramic crystal which exhibits excellent output stability over time. The accelerometer incorporates an internal circuit with in a two-wire IEPE system which transmits its low impedance voltage output through the same cable that supplies the constant current power. Signal ground is internal shielded and isolated from the outer case of the unit. Polarity inversion protection for the amplify circuit is inherent in the circuit design. The welded stainless-steel construction provides a hermetic housing. The standard MIL-C-5015 glass insulated connector provides long-term stability over the operating temperature range. In addition to adhesive mounting, 312A has 1/4 -28 threaded holes for stud mounting on the test object. The 312A provides wide frequency response and shock resistance, which is ideal for industrial vibration monitoring under incidental shock environment. Senter's model 16-L is a MIL-C-5015 connector mating cable for the sensor.

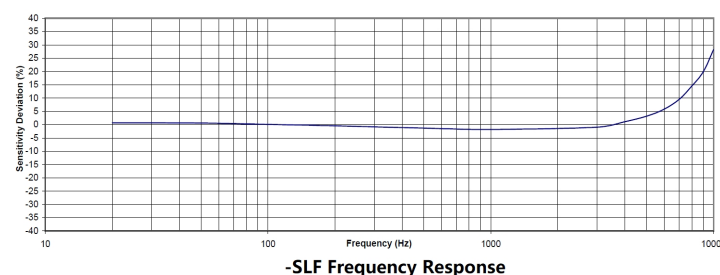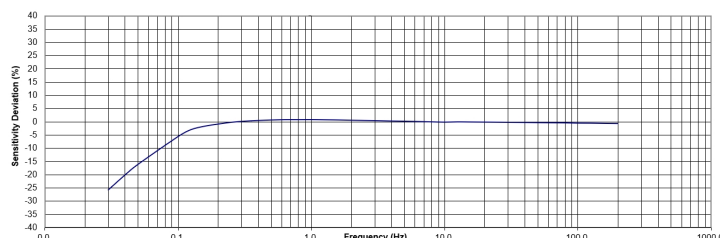

-SLF Frequency Response

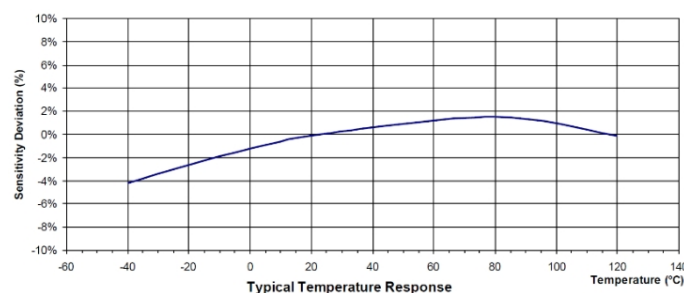

Typical Temperature Response

## Specification

Typical at +24°C (+75°F), 24Vdc, 4 mA and 100Hz, unless otherwise stated.

Part Number	-10-SLF	-50-SLF	-80-SLF	-100-SLF	
Dynamic Range	±10	±50	±80	±100	g, peak
Sensitivity ±10%	500	100	100	50	mV/g
Freq. Resp. ±5%	0.15-4000	0.06-4000	0.06-4000	0.06-4000	Hz
Freq. Resp. ±3dB	0.05-6000	0.02-6000	0.02-6000	0.02-6000	Hz
Resonant Frequency	20	20	20	20	kHz
Transverse Sensitivity	<5	<5	<5	<5	%
Temp. Resp., -55 to +125°C	±10	±10	±10	±10	%
Non-Linearity	±1	±1	±1	±1	%FSO
Residual Noise	0.0002	0.0005	0.0005	0.0005	g RMS
Shock Limit	2000	2000	2000	2000	g
Warm-up Time	<30	<75	<75	<75	second
Weight	87	87	87	87	Gram

Specifications	Standard	Units
Bias Voltage	10 to 14	Vdc
Supply Voltage	18 to 30	Vdc
Supply Current	2 to 10	mA
Output Impedance	<100	Ω
High Voltage Insulation (Pin A & Pin B to Case).	4000	Vac(@60 seconds)
Operating Temperature	-55 to +125°C	°C
Humidity	Hermetically Sealed	
Case Material	316L Stainless Steel	
Sensing Element	Piezo Ceramic (Shear)	
Connector	2 Pin MIL-C-5015	

## Accessories

Calibration certificate included.

Part Number	Description	Availability
PM0011	Mounting stud ¼-28 to ¼-28 thread	One stud Included
PM0008	Mounting stud ¼-28 to M6 thread	
PM0007	Mounting stud ¼-28 to M10 thread	
PM0445	Adhesive mounting adapter	Optional
MB0001	Flat bottom magnet mounting adapter	Optional
MB0011	Saddle-shaped magnet mounting adapter	Optional
16A-10	10 meter mating cable with MIL-C-5015 connector	Optional
16A-10-B	10 meter mating cable with MIL-C-5015 to BNC connector	Optional
IN-03	3 channels IEPE signal conditioner	Optional
IN-91	Portable vibration analyzer	Optional
IN-3062	8 channels data acquisition system	Optional

## Measurement configuration

Sensor	Mating cable	Signal conditioner	BNC cable	Data acquisition	Computer
					

## Ordering information

<b>312</b>	<b>A</b>	-	<b>10</b>	-	<b>SLF</b>	-	<b>A</b>
<b>Model</b>	Output signal	-	Range	-	Low frequency option	-	Mounting stud
<b>312</b>	A=IEPE output	-	10=10g 50=50g 80=80g 100=100g	-	SLF= Super low frequency Blank= Standard FR	-	A= ¼-28 to ¼-28 thread B= ¼-28 to M6 metric thread C*=Special

