

High temperature PE accelerometer



Features




- High sensitivity/resolution
- Top connector/cable
- Adhesive or stud mounting
- Hermetic seal
- Annular shear mode
- Wide frequency response

Application

- Engine research
- Shock testing
- Modal analysis
- Aircraft testing
- Auto exhaust system

Description

The model 573P is a high-level signal output piezoelectric accelerometer designed specifically for measuring high temperature vibration on structures and test purpose. The unit is hermetically sealed and ideal for use in extreme environments. This sensor is the industry standard for vibration/shock accelerometers. The model 573P features a 10-32 threaded mounting hole. The accelerometer is a self-generating device that requires no external power source for operation. Model 573P operating in annular shear mode. These specially designed crystals exhibit low base strain sensitivity, high resonance frequency, and excellent output stability over time. Signal ground is connected to the outer case of the unit. The accelerometer features a 10-32 top connector and requires a low-noise coaxial cable for error-free operation. Senther's model 11P-3 is a 10-32 to BNC breakout low noise cable for the sensor.

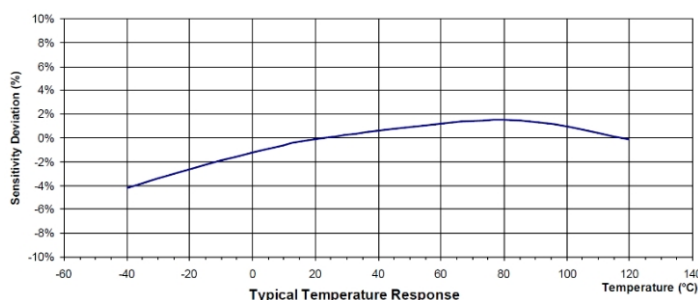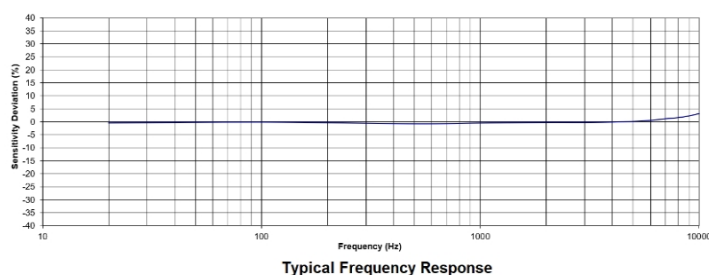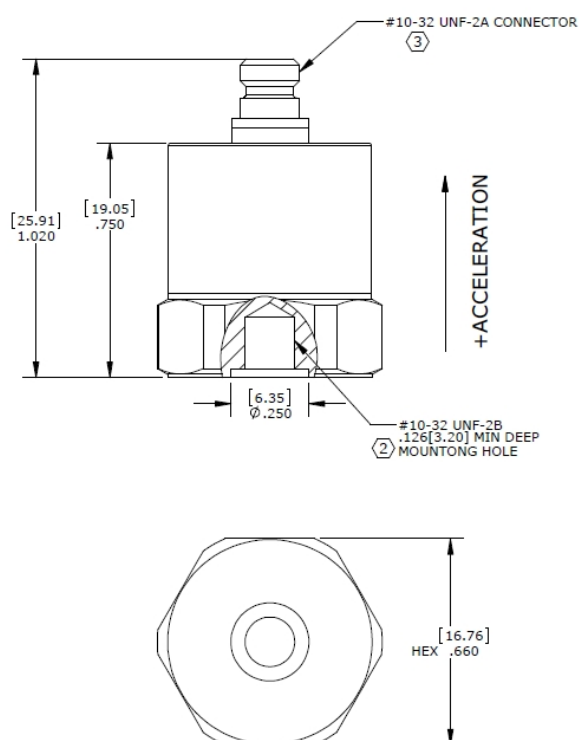

Specification

All values are typical at +24°C (+75°F) and 100Hz unless otherwise stated

DASH NO.	-50	-30	-20	-13	
SENSITIVITY, TYPICAL	50	30	20	13	pC/g
SENSITIVITY, MINIMUM	40	24	14.5	9.0	pC/g
FREQUENCY RESPONSE ±5%	1-4000	1-5000	1-6000	1-6500	Hz
FREQUENCY RESPONSE ±3dB	0.2-12000	.2-14000	0.2-15000	0.2-16000	Hz
RESONANT FREQUENCY	26	32	30	33	kHz
TRANSVERSE SENSITIVITY	<5	<5	<5	<5	%
TEMPERATURE RESPONSE, -70 to +260°C	±10	±10	±10	±10	%
LINEARITY	±1/1000g	±1/1000g	±1/1000g	±1/1000g	%FSO
DYNAMIC RANGE	±500	±800	±1250	±2000	g
SHOCK LIMIT	±5000	±5000	±5000	±5000	g

PARAMETERS	VALUE	UNITS
INTERNAL RESISTANCE (@100Vdc)	>10	GΩ
INTERNAL RESISTANCE @ +260°C (+500°F)	>10	MΩ
CAPACITANCE (NOMINAL)	1050	pF
GROUNDING	Case Grounded	
INSULATION RESISTANCE (@100Vdc)	>100	MΩ
OPERATING TEMPERATURE	-70 to +260	°C
HUMIDITY	Hermetically Sealed	
MATERIAL (Casing)	Stainless Steel	
SENSING ELEMENT	Piezo Ceramic	
WEIGHT	12	Grams
MOUNTING TORQUE	18 (2.0)	lb-in(Nm)

Accessories

Calibration certificate included.

Part Number	Description	Availability
PM0231	Mounting stud 10-32 to 10-32 thread	One stud Included
PM0356	Mounting stud 10-32 to M5 thread	
MB0014	Magnet mounting adapter	Optional
PM0276	Adhesive mounting adapter	Optional
11P-3	3 meter low noise mating cable with 10-32(male) to BNC(male) connector	Optional
10P-3	3 meter low noise mating cable with 10-32(male) to 10-32(male) connector	Optional
IN-06	3 channels charge converter	Optional
IN-07	1 channel inline charge converter	Optional
IN-3062	8 channels data acquisition system	Optional

Measurement configuration



Ordering information

573	P	-	13	-	A
Model	Output signal	-	Typical sensitivity	-	Mounting stud
573	P=Charge output	-	13=13pC/g 20=20pC/g 30=30pC/g 50=50pC/g	-	A= 10-32 to 10-32 B= 10-32 to M5 C*=Special



Senter reserves the right to make changes to any products or technology herein to improve reliability, function or design. Senter does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.