

## 10-32 to BNC low noise mating cable



### Electrical


CAPACITANCE	
(CONDUCTOR TO SHIELD)@1kHz.....	32 pF/ft
RESISTANCE (CONDUCTOR).....	0.2 Ω/ft
INSULATION RESISTANCE (@100Vdc) .....	>1000 MΩ
INSULATION RESISTANCE @+100° C (@100Vdc).....	>100 MΩ
NOISE(PEAK TO PEAK).....	1.5pC MAX

### Physical

WEIGHT (CONNECTORS NOT INCLUDED) .....	3 Grams/ft
BEND RADIUS.....	10x Cable Diameter
CABLE PULL-OUT.....	20 lb
COUPLING TORQUE.....	1.5 (0.2) lb-in (Nm)
OPERATING TEMPERATURE.....	-50 to +260 ° C
SHOCK LIMIT.....	5000 g

### Features

- Easy plug and play
- Low noise conductor
- Durable
- Strong cable assembly
- Reliability connector

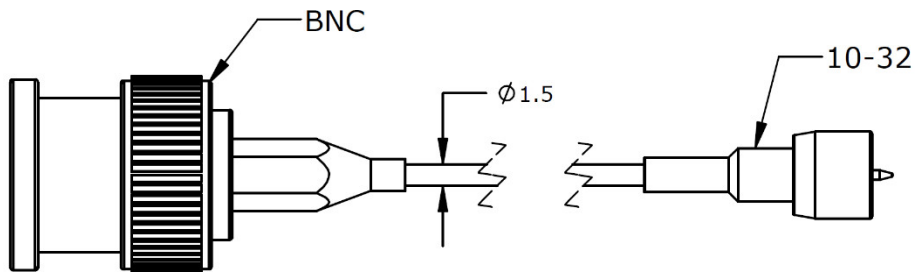

### Ordering Information

