

## Port welded pressure sensing element



### Performance

Pressure range(FS)	1~70 bar
Nonlinearity(BFSL typical)	±0.1% FS
Stability(typical)	±0.1% FS/year
Repeatability	±0.05% FS
Pressure hysteresis	±0.05% FS
Load resistance	>5MΩ
Insulation resistance	>100MΩ

### Current excitation

Excitation	0.5~2mA
FSO(@1.5mA, 25°C)	>70mV
Input impedance	2500±500Ω
Output impedance	3000±500Ω
Zero offset(@25°C)	±2mV

### Voltage excitation

Excitation	10~14Vdc
FSO(@10Vdc, 25°C)	100±2mV
FSO(70 bar only)	150±3mV
Input impedance	8000±2000Ω
Output impedance	3000±500Ω
Zero offset(@25°C)	±2mV

### Environmental


Operate temperature	-40 to 125°C
Compensated temperature	-10 to 70°C
Compensated temperature(1bar only)	0 to 70°C
Temperature zero shift	±1% FSO
Temperature sensitivity shift	±1% FS
Thermal hysteresis	±0.1% FS
Overload	>2 * FS
Overload(70 bar only)	>1.5 * FS
Media	#316L SS compatible
Housing	#316L SS
Pressure port	O-ring Seal
Electrical connection	Ribbon Cable or Connect Pins

### Features

- Easily be welded
- Oil filled
- Low cost OEM
- Range: 1 to 70 bar
- Wide temperature range
- Temperature compensated
- Compatible with corrosive media

### Application

- Process Automation & Control
- Fresh and waste water
- Pressure transmitters
- Medical instruments

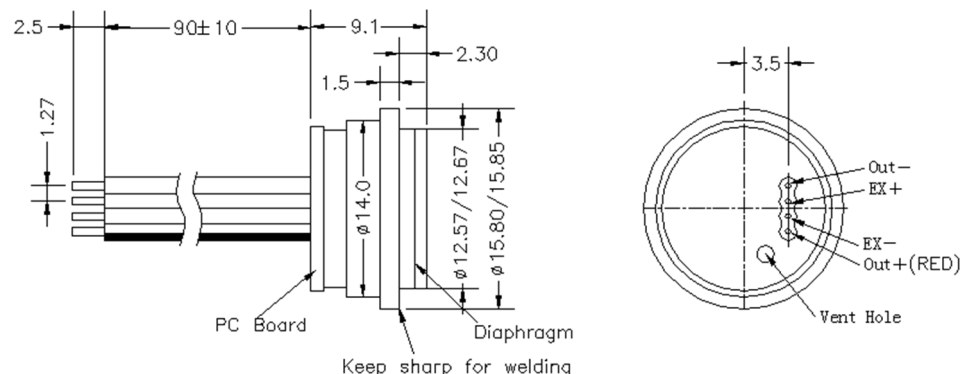

### Ordering Information

P3405A-10BA-R

